
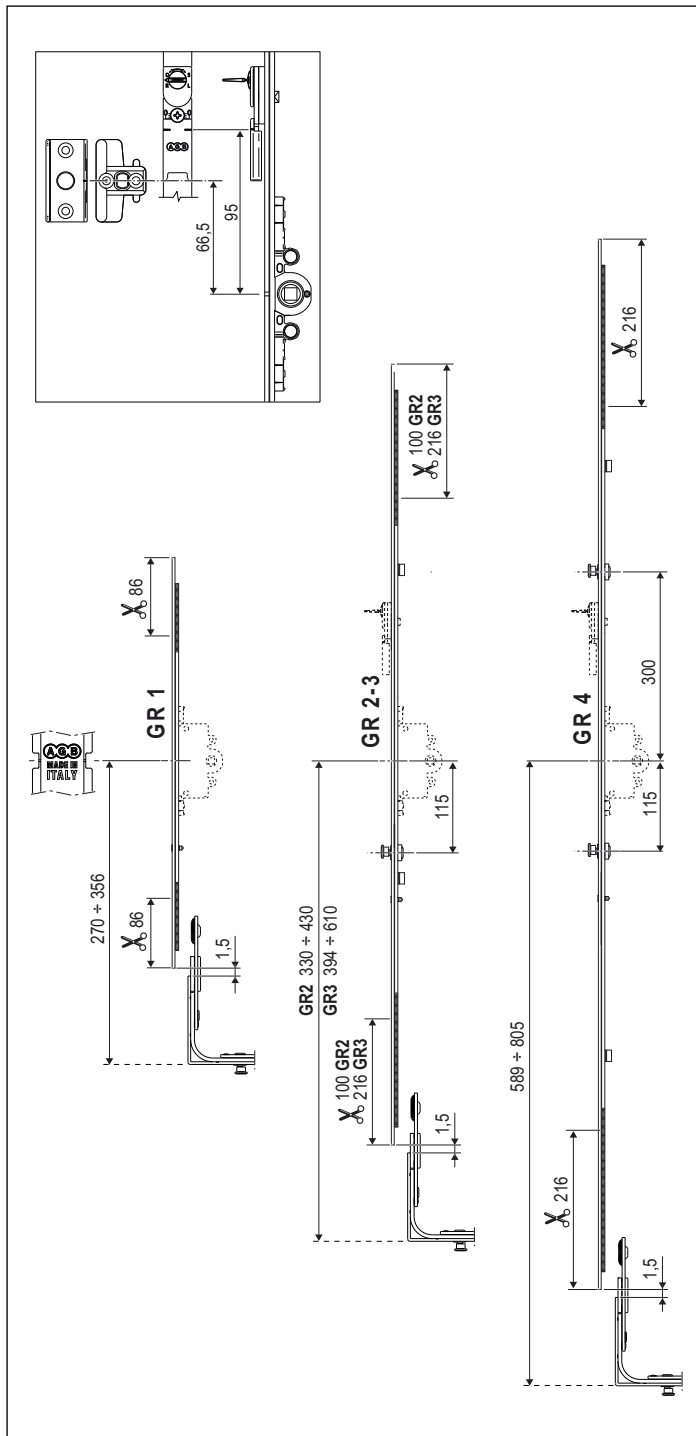


Tilt&Turn/tilt only with variable/central handle height, without monobloc



Description

Only rod for balcony-door espagnolette with variable handle height. Suitable to assembly the handle monobloc of the desired backset.

As standard, adjustable mushroom cam $\pm 1,5$ mm in height, ± 1 mm in pressure with a 4 mm Allen wrench, 18+18 mm stroke.

Suitable to install the DSS device from GR2.

Application

Use as espagnolettes applying an espagnolette box of the desired backset (the boxes have a backset from 15 to 50 mm with interval of 5 mm). It can be used even as a connecting element in tilt only windows for example (without application of the box).

Fastening

Dedicated cutter for cutting the rods and the set up of the faceplate hole.

For PVC/Aluminium-wood/Aluminium Euro-groove doors/windows: 3.5/4.3x25 mm screws with thread suitable for the material used for frame construction; for wooden doors/windows: 3.5x35 mm to 4x40 mm screws.


The handle must be fixed to the bushings, with M5 screws with variable length according to the thickness of the rebate.

Note. The application range of the espagnolettes changes according to the corner drive used.

The application fields in the table refer to the corner drives 125x125 mm installed both up and down.

For details on the application range, you need to check the "Application range of the connectable components [mm]" listed in the corner drive data sheets.

Screw hole position



GR	Centre-A ref							Centre-B ref						
	6°	5°	4°	3°	2°	1°	1°	2°	3°	4°	5°	6°	7°	
1						51	51							
2						51	51							
3					179	51	51	179						
4			370	268	150	51	51	165	267	340				

Order Specifications

Article	GR					
A50111.00.11	11	540-712 *	540-712 *	462	-	-
A50111.00.12	12	660-860 *	660-860 *	610	1	115
A50111.00.13	13	820-1220 *	820-1220 *	970	1	115
A50111.00.14	14	1190-1610 *	1190-1610 *	1360	2	115/300

* **Note.** The maximum application field is under reduction, according to the cut to obtain the handle desired.