
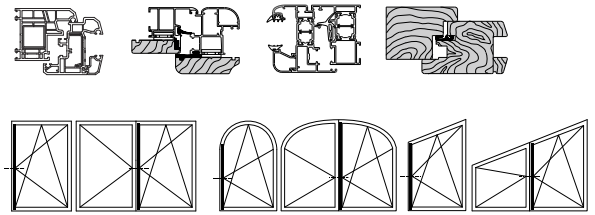


Tilt&Turn with fixed handle height, espagn. without DSS

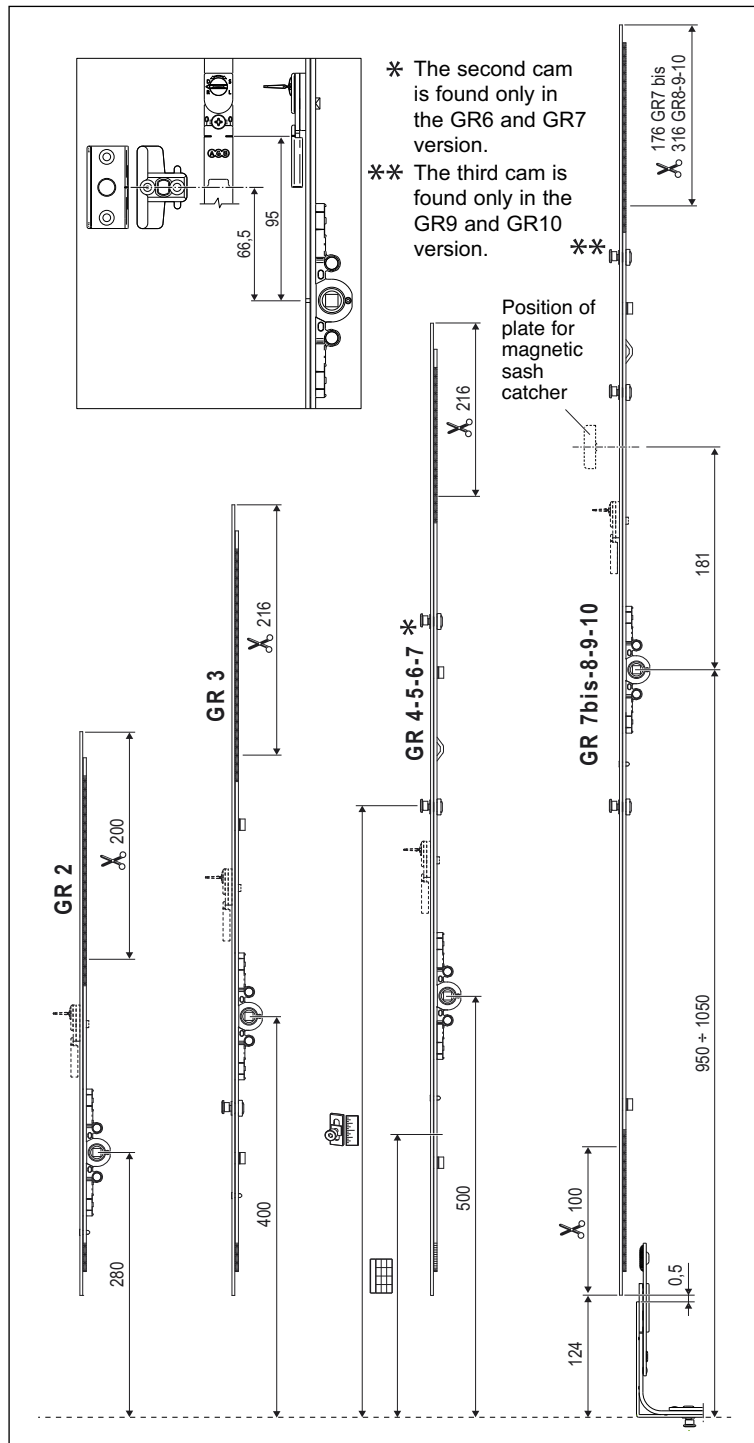

Description

Espagnolette with fixed handle height and arranged for connection to a top and bottom corner drive, as well as extensions.

As standard, adjustable mushroom cam $\pm 1,5$ mm in height ± 1 mm in pressure with a 4 mm Allen wrench, 18+18 mm stroke.

The DSS device has to be ordered separately.

Possibility to change the backset by replacing the monobloc.

Application

For Tilt & Turn windows with 1 or 2 sashes.

Trimmable also on the bottom from GR7 bis to GR10, with the possibility to change the height of the handle from 950 to 1050 mm.

Fastening

For PVC/Aluminium-wood/Aluminium Euro-groove doors/windows: 3.5/4.3x25 mm screws with thread suitable for the material used for frame construction; for wooden doors/windows: 3.5x35 mm to 4x40 mm screws.

The handle must be fixed to the bushings, with M5 screws with variable length according to the thickness of the rebate.

Note. The application range of the espagnolettes changes according to the corner drive used.

The application range shown in the table refers to 125x125 mm corner drives.

For details on the application range, you need to check the "Application range of the connectable components [mm]" listed in the corner drive data sheets.

Order Specifications

Article	GR				
A50125.XX.02	2	610-810	561	-	-
A50125.XX.03	3	794-1010	761	1	319
A50125.XX.04	4	994-1210	961	1	700
A50125.XX.05	5	1194-1410	1161	1	700
A50125.XX.06	6	1394-1610	1361	2	700-1120
A50125.XX.07	7	1594-1810	1561	2	700-1320
A50125.XX.17	7bis	1634-1810 *	1561	2	700-1380
A50125.XX.08	8	1794-2110 *	1861	2	700-1380
A50125.XX.09	9	1994-2310 *	2061	3	700-1380-1720
A50125.XX.10	10	2194-2510 *	2261	3	700-1380-1920

Backsets (XX) = 15, 25, 30, 35, 40, 45, 50 mm.

* Note. The maximum application field is under reduction, according to the cut to obtain the handle desired.

Screw hole position

GR	Ref A-B													
	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°
2	131	229	331											
3	131	265	349	451	579									
4	131	281	449	551	665	755								
5	131	281	449	551	665	740	960							
6	131	281	449	551	665	740	940	1065	1160					
7	131	281	449	551	665	740	940	1065	1265	1360				
7bis	131	316	486	657	740	999	1101	1231	1345	1420				
8	131	316	486	657	740	999	1101	1231	1345	1435	1575			
9	131	316	486	657	740	999	1101	1231	1345	1420	1575	1665	1760	
10	131	316	486	657	740	999	1101	1231	1345	1420	1575	1775	1865	1960