


## Low terminal with tilt hook



### Description


Terminal with hook for tilt position that acts to the dedicated striker of the jamb.

### Use

The terminal with tilt hook is used for tilt opening without the hardware groove on lower jamb of window. Choose the terminal according to the SRH, the espagnolette GR and the type of central point to obtain a correct operation and avoid sash damages in the lower part during the tilt position.

### Fastening

For PVC/Aluminium-wood/ European groove aluminium windows: 3,5/4,3x25 mm screws with suitable thread for the material used to install the window; for wooden windows: screws from 3,5x35 mm to 4x40 mm.

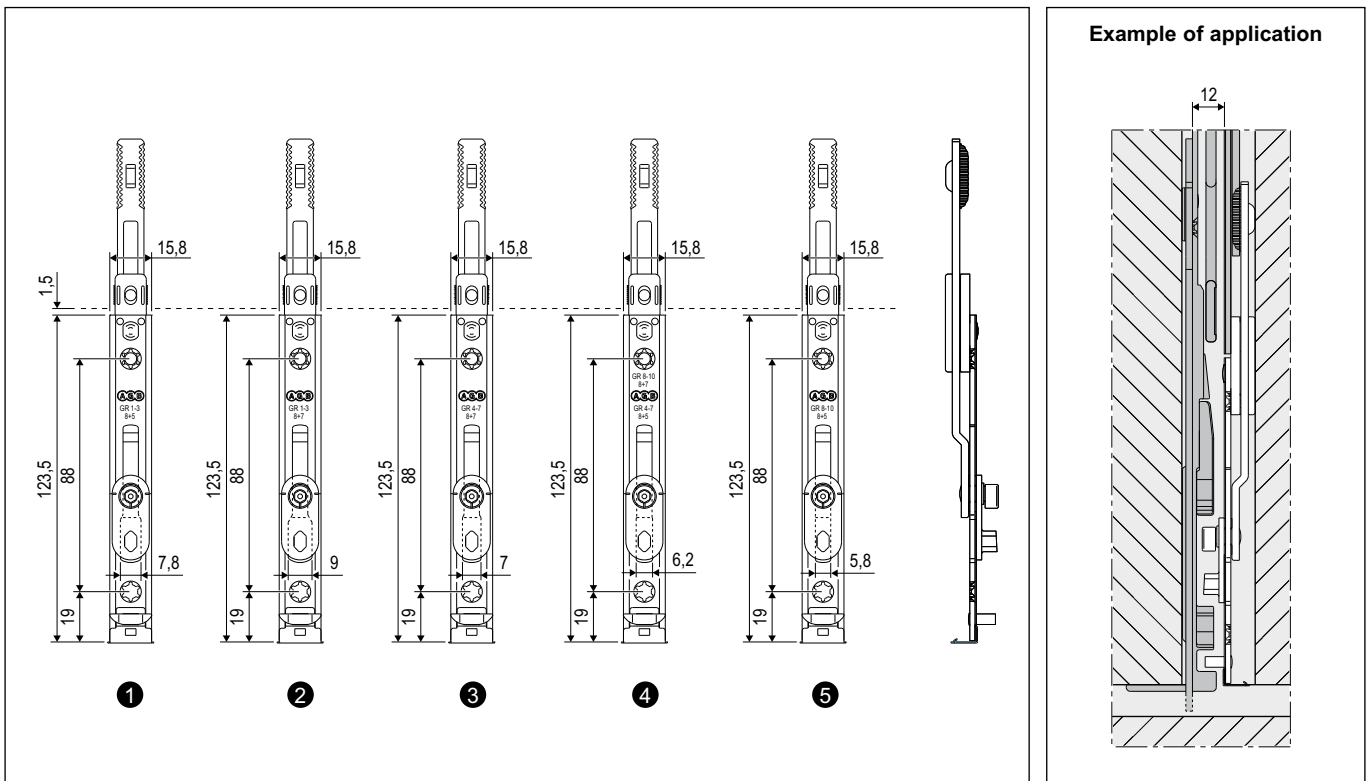

### Order Specifications

| Ref. | Article   |
|------|---|
| ①    | A50193.02.03 GR 1+3 For all the types except Euronut 8+7        |
| ②    | A50193.02.04 GR 1+3 For Euronut 8+7                             |
| ③    | A50193.02.05 GR 4+7 For Euronut 8+7                             |
| ④    | A50193.02.06 GR 4+7 For all the types and Euronut 8+7 (GR 8+10) |
| ⑤    | A50193.02.07 GR 8+10 For all the types except Euronut 8+7       |