



GR1 - 30x125 with 1 cam, gap 18 mm



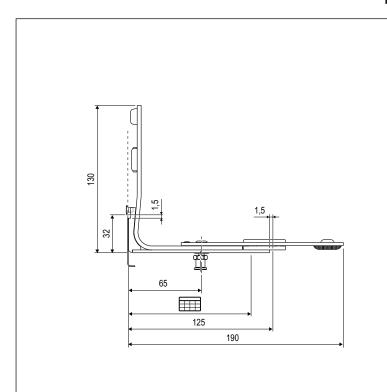



Description

Connecting element that transmits the movement from the jamb to the transom. As standard, adjustable mushroom cam $\pm 1,5$ mm in height ± 1 mm in pressure with a 4 mm Allen wrench, 18+8 mm stroke.

Application


Used with espagnolette, lever rod or movement device, it has to close and tilt the sash on lower transom in case of applications with threshold in gap 18 mm.

Mounting

3.5/4.3x25 mm screws, with thread suited to material used for frame construction.

Screw hole position

| GR2 | | | | |
|-----|---------|---------|--|--|
| | Ref A-B | Ref A-D | | |
| 1° | 107 | 120 | | |
| 2° | 131 | - | | |

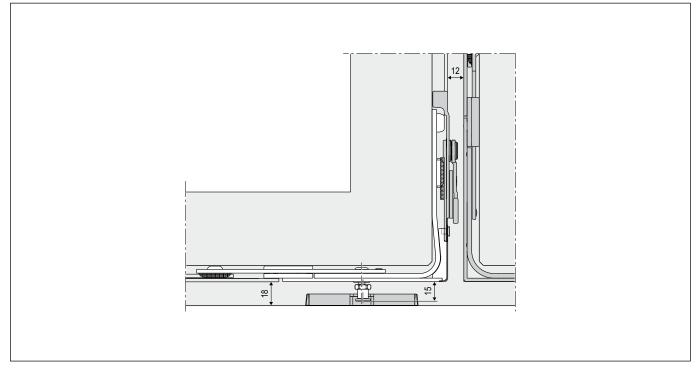

Order Specifications

| GR | Article | •• | 4 | | |
|----|--------------|-----------|---|------------------------------|--|
| 1 | A50309.01.03 | 287-1204* | 1 | * Use of extensions excluded | |

