




Upper reversing element for Sicurtop



Description


200 mm upper reversing terminal with 9,5 mm diameter push rod and 20 mm throw. 16 or 20 mm faceplate.

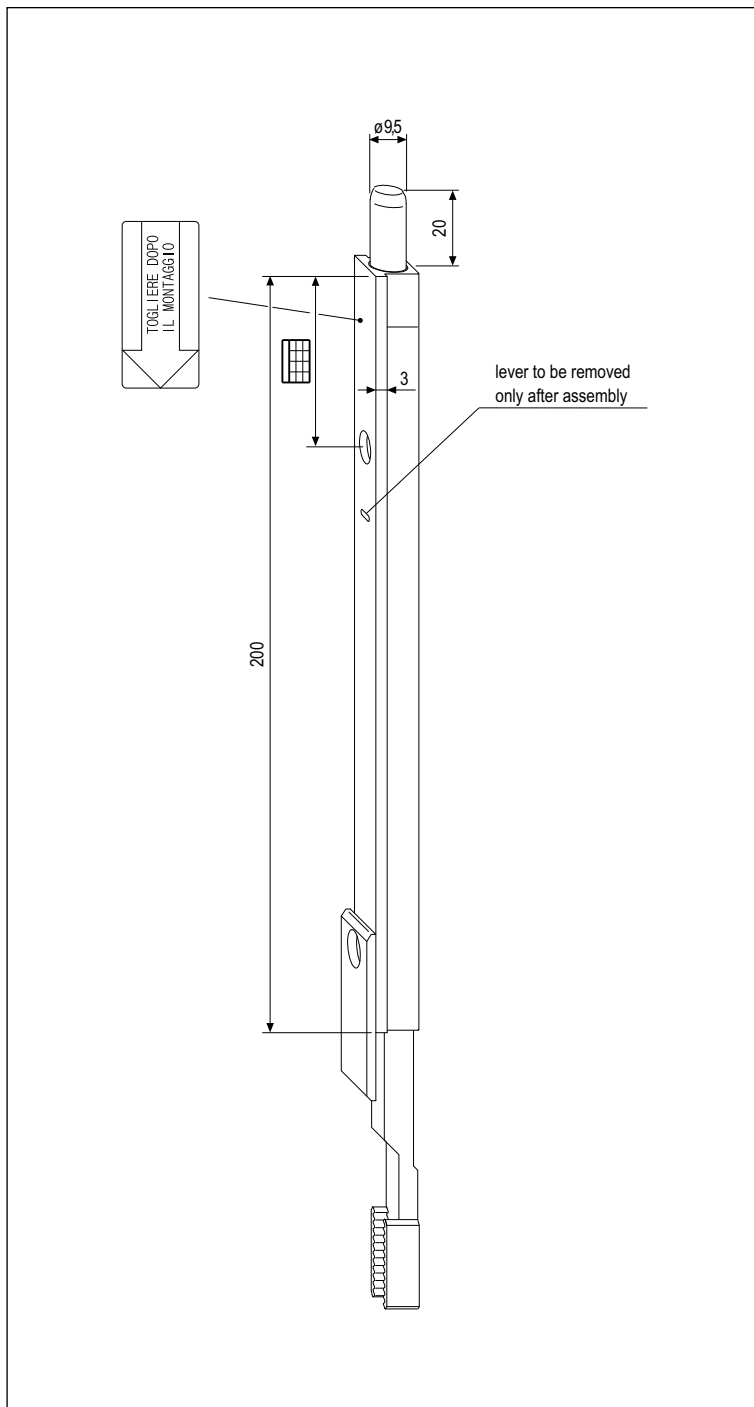

Application

For Sicurtop locks mod. W01686, W01688, with 16 or 20 mm faceplate and Poseidon mounted on single or double-sash doors, designed to provide a locking point on the head jamb. It can also be connected with extensions for Sicurtop locks in the version with roller cam and roller cam + bolt.


Mounting

Use two 3,5x30 or 4x30 mm flathead screws.

 **Screw hole position**

	B-A ref.
	
1°	48
2°	180

Order Specifications

Article	Forend mm	
W01690.00.03	16	200
W02090.00.03	20	200