
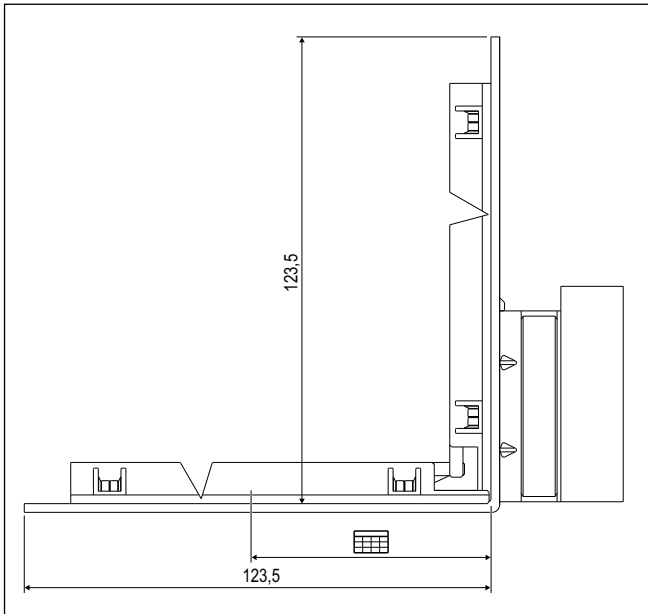



Surface mounted corner hinge with adapter



Description

Adjustable female component of the corner hinge for surface mounted systems. Left or right versions available.

Application

For windows with eurogroove 16/12 on the jamb and transom, with rebate 18 or 20 mm. To obtain the minimum SRW, reduce the dimensions of the 35 mm corner by breaking the end part as shown in the image. It must be coupled to the hinge support.

Adjustment



The following sash adjustments can be made using a 4 mm hexagonal wrench:

- ① horizontal adjustment (on hinge support);
- ② pressure adjustment $\pm 1,5$ mm;
- ③ vertical adjustment $+4/-3$ mm.

Mounting

3.5/4.3x25 mm screws, with thread suited to material used for frame construction.

Please note: can be used in angled windows in case locking points are not required on the hinge side.

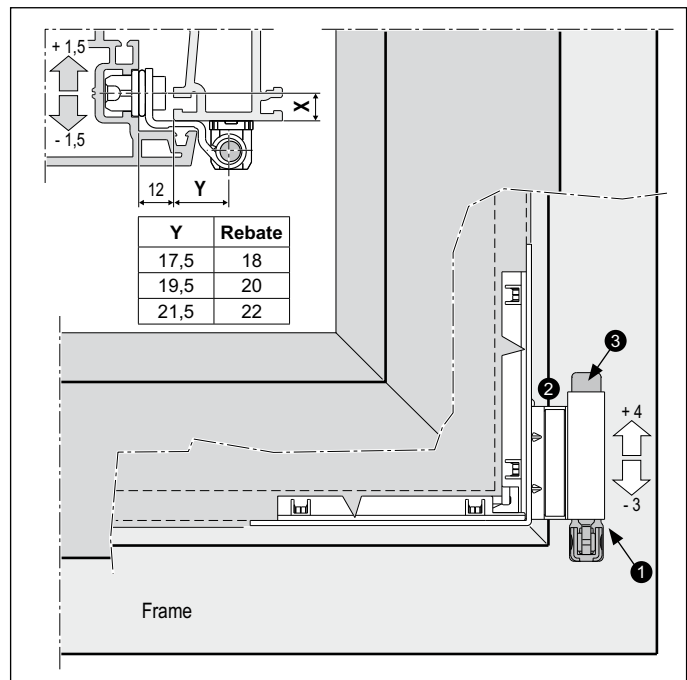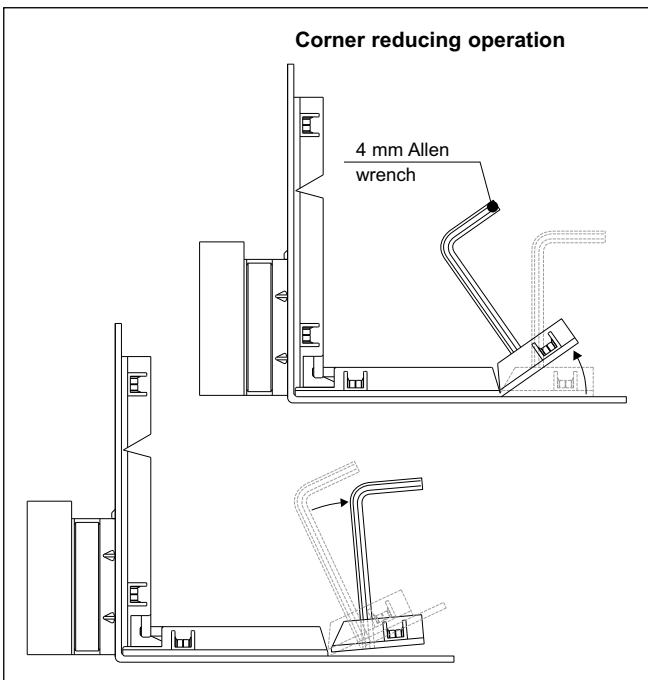

Order Specifications

Article	Type
A50911.XX.01	rh
A50911.XX.02	lh

XX	Axis	Rebate
24	9	18
26	9	20
28	9	22
34	13	18
36	13	20
38	13	22
46	26	20

Screw hole position	Screw hole position	
	Ref D-C	Ref D-A
1°	29	35
2°	71	71
3°	107	107
4°	-	-