
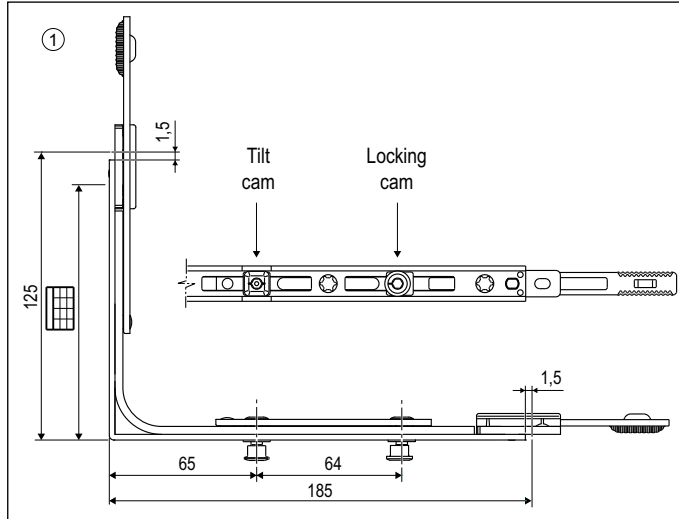


185x125 with double cam extendable and non extendable



Description


Closing element to use in conjunction with the espagnolette in the PVC systems.
 As standard, adjustable mushroom cam $\pm 1,5$ mm in height and ± 1 mm in pressure with a 4 mm Allen wrench, 18+8 mm stroke.
 In the non extendable version, suitable for narrow sashes, minimum SRW is 267 mm.

Application

It is used in combination with the espagnolette in the PVC systems with sash closing function on the bottom transom and for tilt operations, using the anti-burglar striker between the two cams.
 The non extendable version makes it possible to create sashes up to SRW=311 mm with inside corner hinge, 277 mm by removing the zamak end part of the corner hinge.
 It can be used with both fixed and variable espagnolettes and bolts.

Mounting

3.5/4.3x25 mm screws, with thread suited to material used for frame construction.


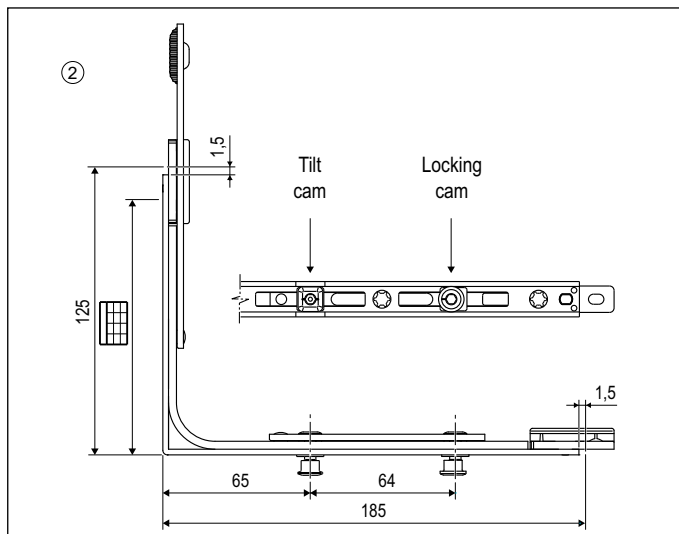


Application range of the connectable components [mm]

	Extendable	Non-extendable
	SRW Min. hinge	
	381	311
	347	277

Screw hole position

	Ref A-B	Ref A-D
1°	107	97
2°	131	167
3°	-	191

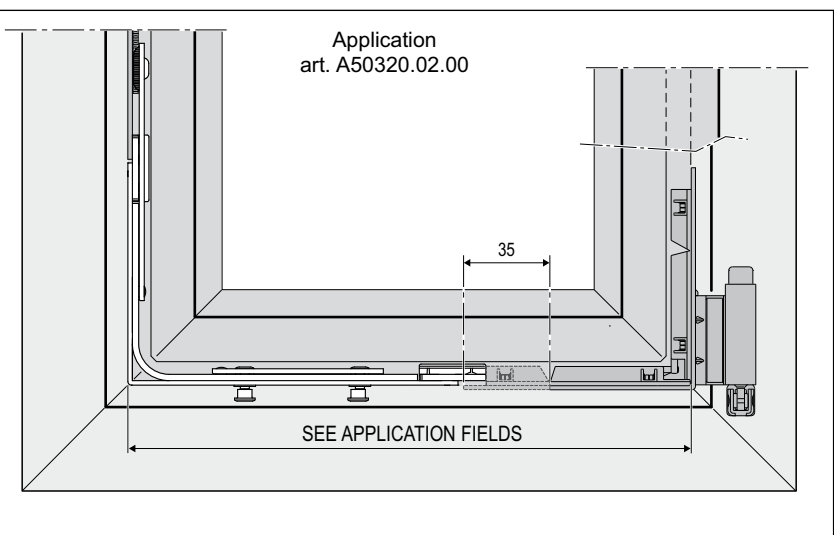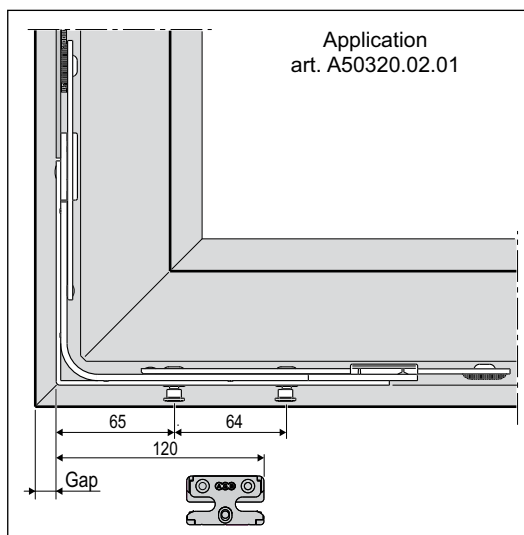

Order Specifications

Ref.	Article				
①	A50320.02.01	347-1204	610-2510	123,5x183,5	1
②	A50320.02.00	277-1204	610-2510	123,5x183,5	1