


Standard cam with concealed screws



Gap 12 mm, axis 13 mm,
24 mm rebate base
(30 mm rebate base version
A52200.CR.XX only)



Opening system	All
Stroke	18 +18 mm
Material	Zamak
Fastening	No. 2 4x40 mm

Description

It is the Artech standard cam striker for wooden windows and doors, gap 12, axis 13, seat 24 mm. One of the screw holes is looped and allows to mount a inclined screw to reach the maximum tightness class against wind. Covering clips are available to hide the fastening screws. The striker can be coupled with the microventilation one.

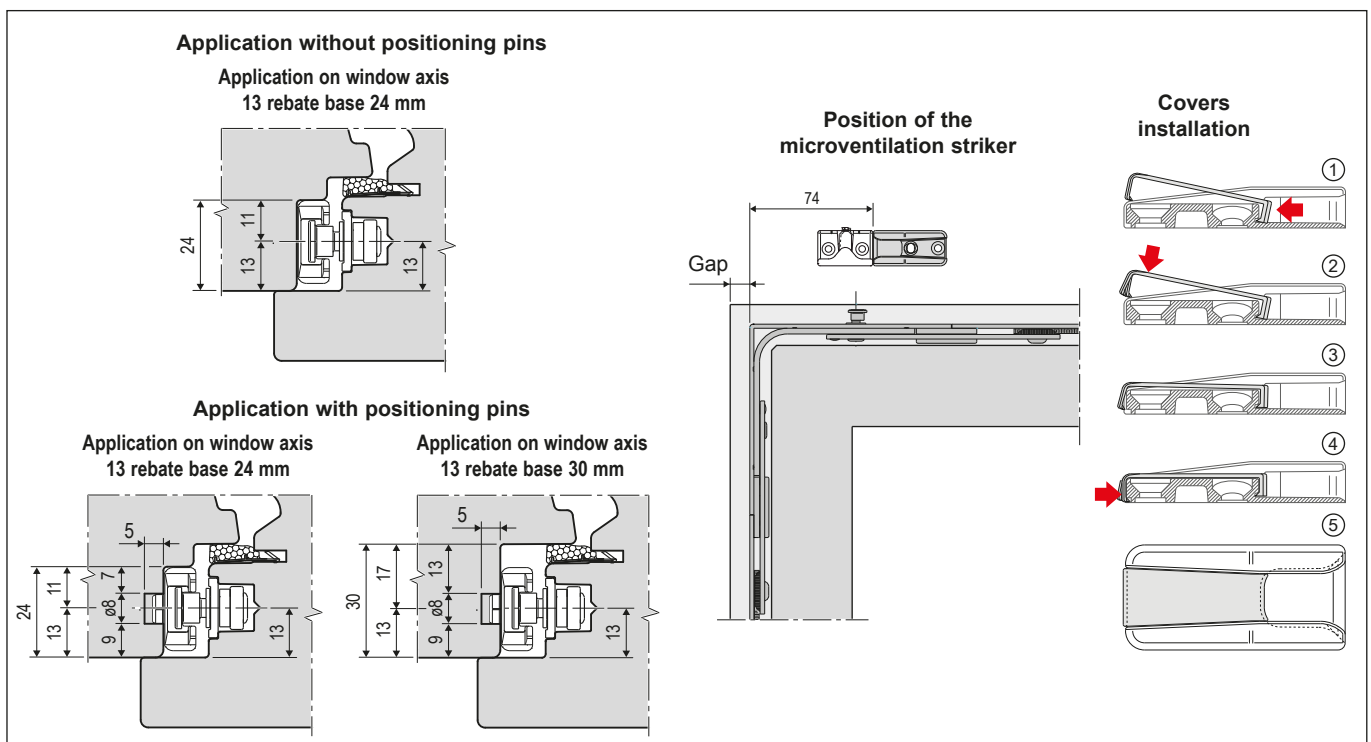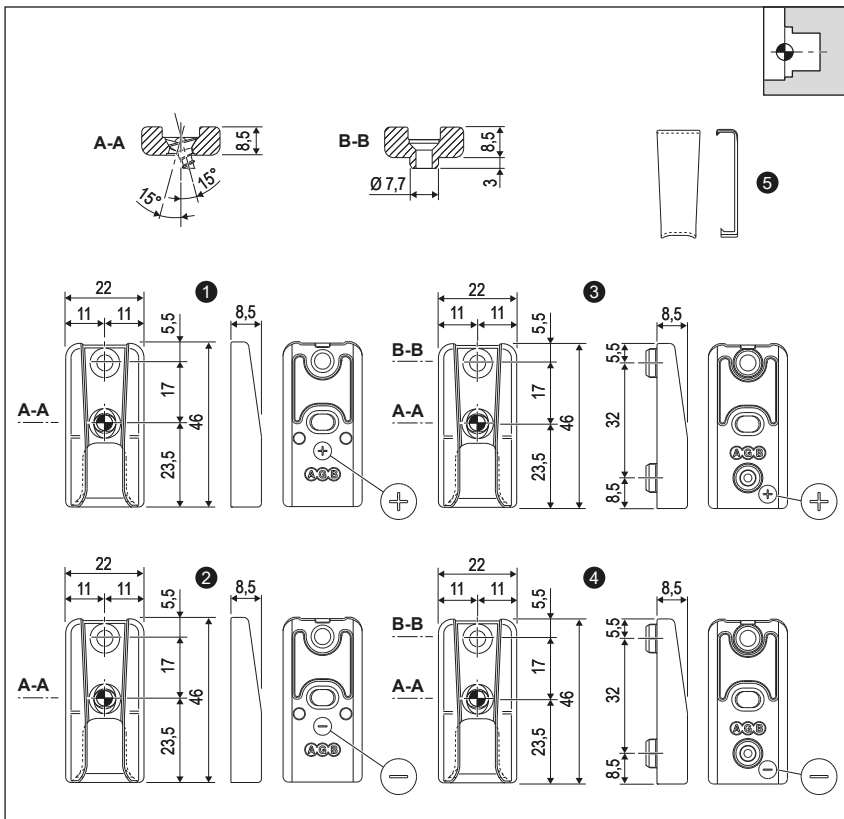

Order Specifications

Ref.	Article	X	Y	Dimensions mm	Description
1	A51400.CR.13	4,9	6,5	22x46x8,5	cam striker
2	A51400.CR.76	4,4	6 (pressure -0,5 mm)	22x46x8,5	cam striker
3	A52200.CR.13	4,9	6,5	22x46x8,5	cam striker with positioning pins ø8x3
4	A52200.CR.76	4,4	6 (pressure -0,5 mm)	22x46x8,5	cam striker with positioning pins ø8x3
5	A52102.01.XX	-	-	-	cam striker cover

Note. Refer to the price list in force to check the availability of the finishes.