
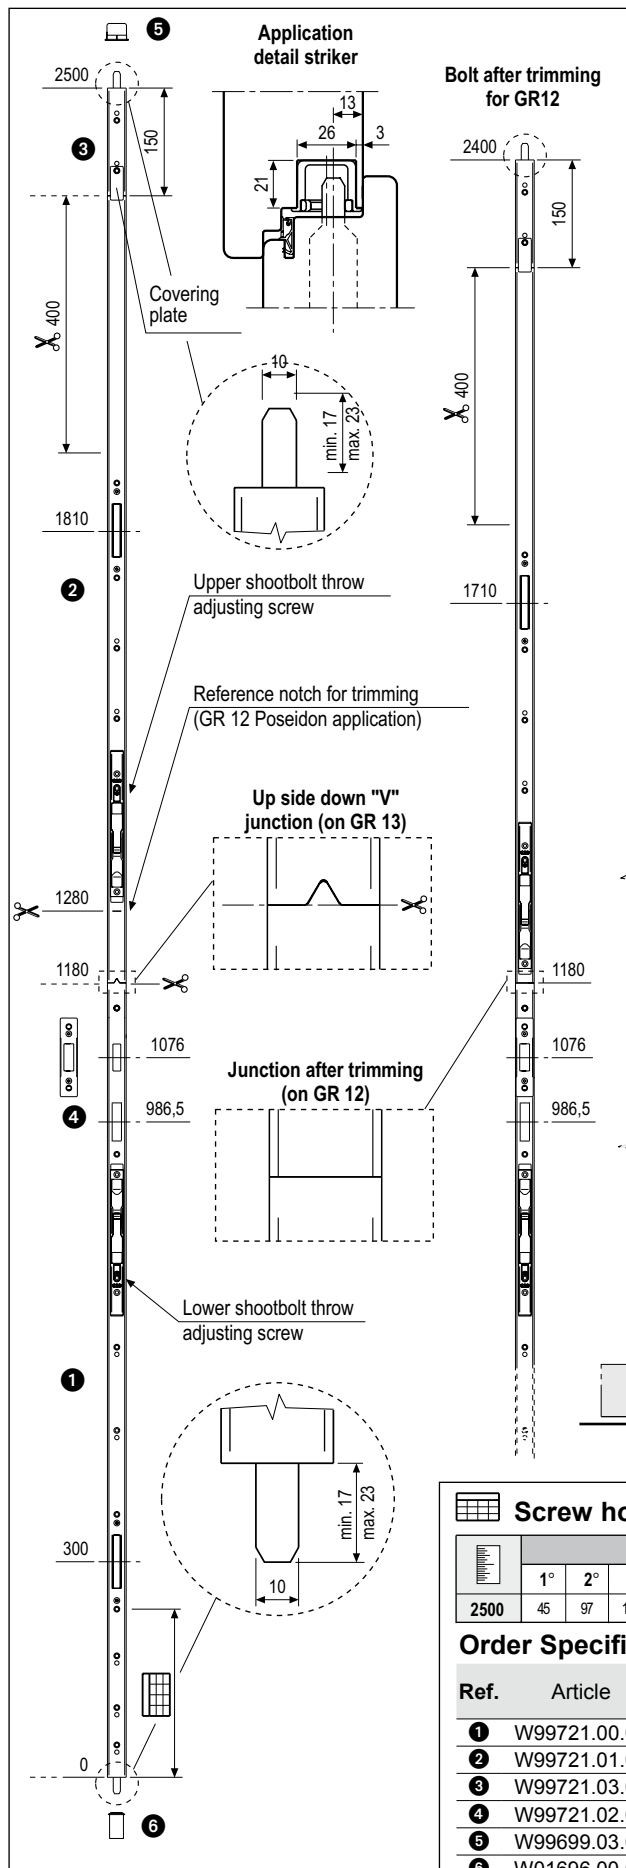


One-piece bolt U26 for Poseidon double rebated sash entrance doors



Description

One-piece steel bolt for double sash rebated entrance doors. It is made of 4 components which have to be assembled: lower bolt with lever and push rod (W99721.00.00), striker for latch to be applied (W99721.02.01), central piece with lever for upper push rod (W99721.01.01), and upper terminal with push rod (W99721.03.00). Adjustable throw (from 17 mm up to 23 mm) compatible with oval hole shoot bolt striker kit and proper adjusting shims (W99699.03.03) and shoot bolts with spring cover W01696.00.04.

Application

Suitable to Sicurtop and Unitop Poseidon locks (GR 12 or 13).

Application fields

- with Poseidon GR 13 door height min. 2100 mm, max. 2500;
- with Poseidon GR 12 the application fields are reduced of 100 mm.


Mounting

Mill the housing for bolt and Poseidon hooks by inserting on axis with the Poseidon multipoint lock, by fixing with at least 4x30 mm screws. Apply the latch plate (W99721.02.01) on the lower part of the bolt (W99721.00.00).

Adjustment

Operate on the torx screws and adjust laterally (± 2 mm) for the pressure of latch and hooks on the strikers.

NB. For GR12 Poseidon applications, use the referring notch for trimming the central part of W99721.01.01 and cut the junction up side down "V" shaped of the lower part W99721.00.00.

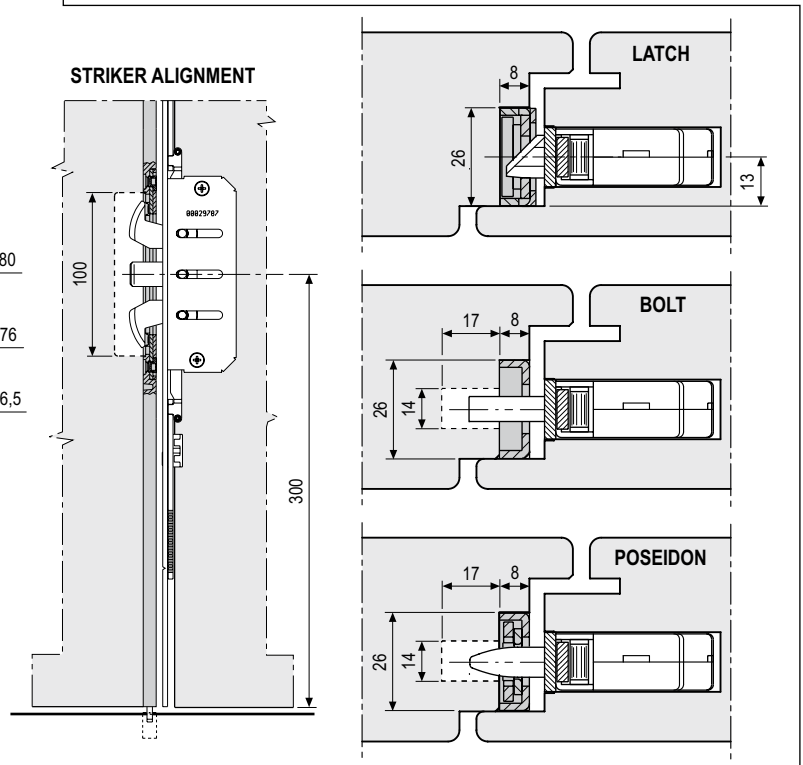

Screw hole position

A-B reference	A-B reference																			
	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°	20°
2500	45	97	169	234	366	520	673	748	911	941	1033	1119	1309	1472	1548	1646	1744	1876	2385	2455

Order Specifications

Ref.	Article	Description
1	W99721.00.00	1180 Lower bolt with lever and push rod
2	W99721.01.01	1170 Central piece with lever for upper push rod
3	W99721.03.00	150 Upper terminal with push rod
4	W99721.02.01	Striker for latch to be applied
5	W99699.03.03	Oval hole shoot bolt striker kit
6	W01696.00.04	Shoot bolt with spring cover