



# Standard cam with concealed screws, -1 mm pressure

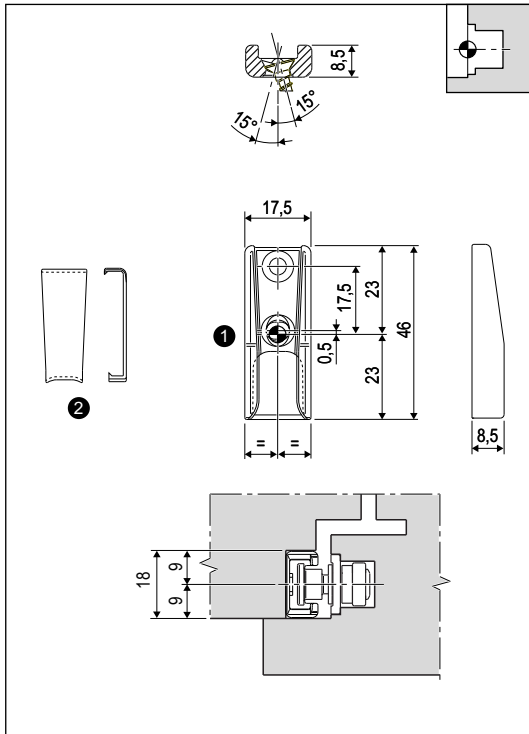

Gap 12 mm, axis 9 mm, seat 18 mm



Opening system	All
Stroke	18 + 18 mm
Material	Zamak
Fastening	N° 2 4x40 mm screws.

### Description

It is an Artech standard cam striker for wooden windows and doors, gap 12, axis 9, seat 18 mm. One of the screw holes is looped and allows to mount a straight or inclined screw to reach the maximum resistance class against wind. Covering clips are available to hide the fastening screws. The striker can be coupled with the microventilation one.

### Order Specifications

Ref.	Article	Dimensions mm	Description
①	A51400.05.13	17,5x46x8,5	cam striker
②	A52102.01.XX	-	cam striker covers

**Note.** Refer to the price list in force to check the availability of the finishes.

