
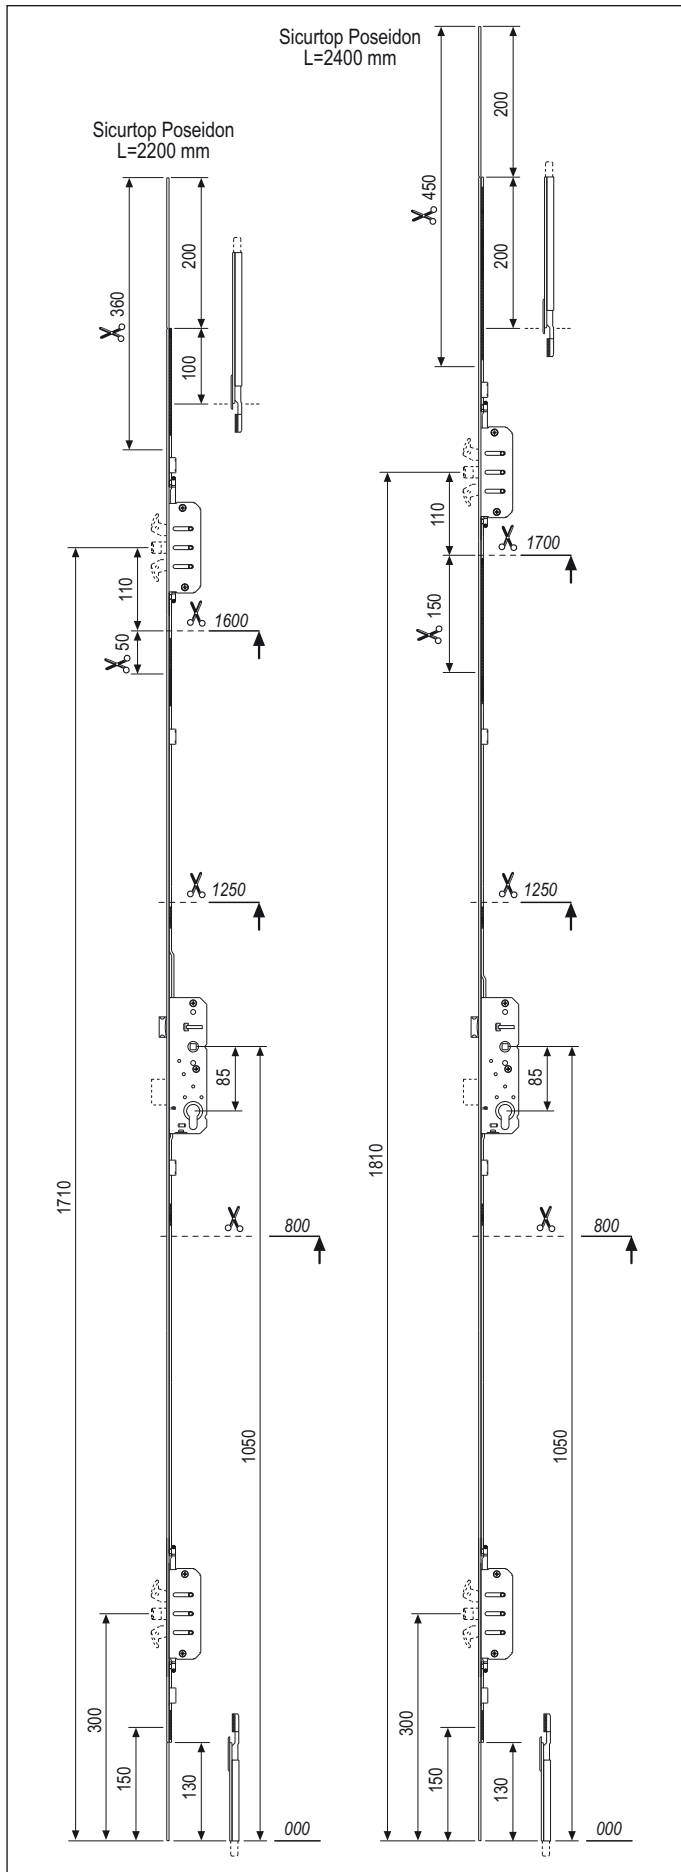


Mod. Poseidon - 85 mm centre



Application

For single and double-sash rebated or flush balcony doors.

Locking points

- Two Poseidon points with two opposite hooks and a central bolt: while coming out, the rounded bolt aligns the sash
- Spring latch
- Central bolt
- It is possible to connect a terminal on the lower side of the rod and an extension or a inverter in the upper side.
- It is possible to connect an extension or a terminal on intermediate positions, in order to modify the height of the Poseidon case or the handle height.

Operation

Locks and unlocks by means of two complete turns of key. A gear drive mechanism made of pressed steel drives the Poseidon devices and any other terminal. The spring latch can be retracted either with the handle or the key: a fixed knob can therefore be mounted on outside of the door.

Technical characteristics

- Reversible steel spring latch, bevelled and rounded to reduce friction.
- Poseidon and lock case screwed to the forend
- Poseidon hooks made of pressed steel, hardened, chromate finish
- Central bolt made of pressed steel blades
- European profile cylinder hole with fastening screw supplied with the lock
- Holes, 38 mm centre beside the cylinder from 35 mm backset
- Holes, 38 mm centre beside the hub from 40 mm backset
- It can be used with extensions and terminals

Measurements

- Centre: 85 mm
- Backsets: 35-40-45-50-55-60-70 mm
- Forend width 16 and 20 mm
- Forend thickness 3 mm
- Forend height: 2200 and 2400 mm, extendable with extensions
- Throw of the hooks and the bolt: 20 mm
- ± 4 mm vertical adjustment
- Hub: 8 mm made of zamak

TRIMS TABLE	SICURTOP 2200		SICURTOP 2400	
	with terminal	without terminal	with terminal	without terminal
Upper trim	100	360	200	450
Lower trim	-	150	-	150
Middle trim	50		150	
Handle height (without extension)	1050	1050+900	1050	1050+900
Handle height (with extension)	1050+750	1100+560	1050+750	1100+560

200 mm upper terminal and 130 mm lower terminal.

Screw hole position

GR	A-B ref.												
	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°
12	45	197	400	595	885	1150	1250	1455	1610	1814	2045	2105	2165
13	45	197	400	595	885	1150	1250	1455	1710	1914	2245	2305	2365

Order Specifications

Article			Forend	↑	▮	⌘
COD	E	GR				
W11200	XX	12	16	1840-2200	2200	2
W11200	XX	13	16	1950-2400	2400	2
W11201	XX	12	20	1840-2200	2200	2
W11201	XX	13	20	1950-2400	2400	2

Backsets (XX) = 35-40-45-50-55-60-70

Central locking point with roller-type spring latch (available for all backsets)

W112XX.XX.XX.210 210 product variation