





## Adjustable - Spring latch+bolt, 85 and 92 centre

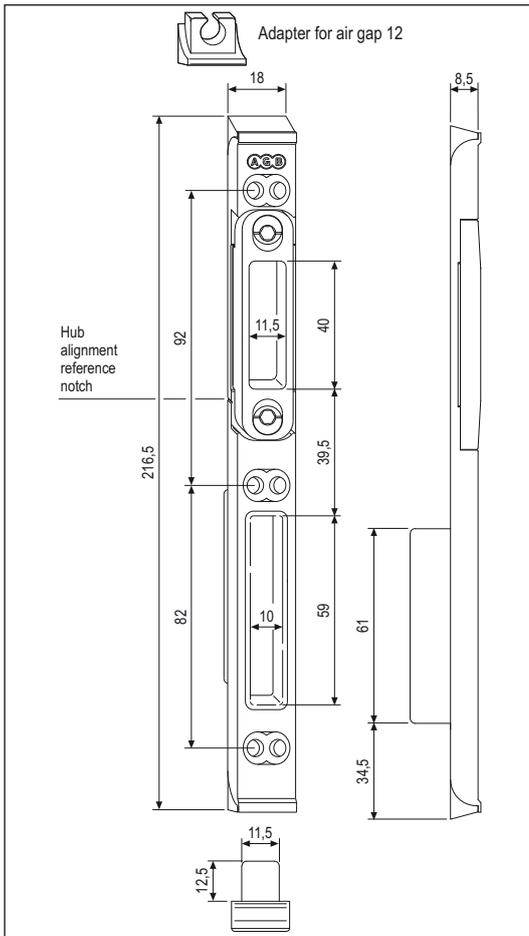

### Gap 12 mm - With adapter



Door type	Single or double-sash entrance or French doors.
Assembly	Surface-mounted on rebate of timber profiles with gap 12 mm.
Material	Die-cast Zamak.
Mounting	Use 3,5x30 mm screws or 4x30 flathead screws.
Application	Adjustable striker for spring latch and bolt, to be used in combination with Sicurtop and Unitop locks with 85 and 92 mm centre.

### Order Specifications

Article	Dimensions mm
W11692.05.01	18x216x8,5

**NB.** The box contains 1 bolt hole plug, 2 plastic packers for gap 12 mm and 3 screw hole plugs for each striker.