

Lock with 37,5 mm backset for 150 and 300 kg L&S

Description

Lift locks with anodised aluminium forend and steel sliding bar, with 2,6 mm thick case, 10 mm hub, hole for cylinder installation.

Application


The lock must be selected based on the width of the stile on which it is to be mounted and on the height of the sliding sash. Two separate backsets are available: 27,5 and 37,5 mm. Each of them comes in 4 different sizes, ranging from a minimum height of 800 mm to a maximum of 2400 mm.

Mounting

Use 4,5x50 mm screws for all screw holes, except the first one above the lock-case where you need to use a 4,5x60 mm screw for 37,5 mm backset and a 4,5x55 mm screw for 27,5 mm backset. The thread must be suitable for the window/door material.


Accessories

- ① Art. G00732.00.XX, 500 mm extension
- ② Art. G00732.01.XX, cover profile

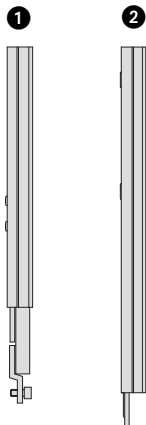

ALTEZZA PERNI		
GR	A	B
1	450	-
2	850	-
3	980*	470
4	980*	620

*facoltativo

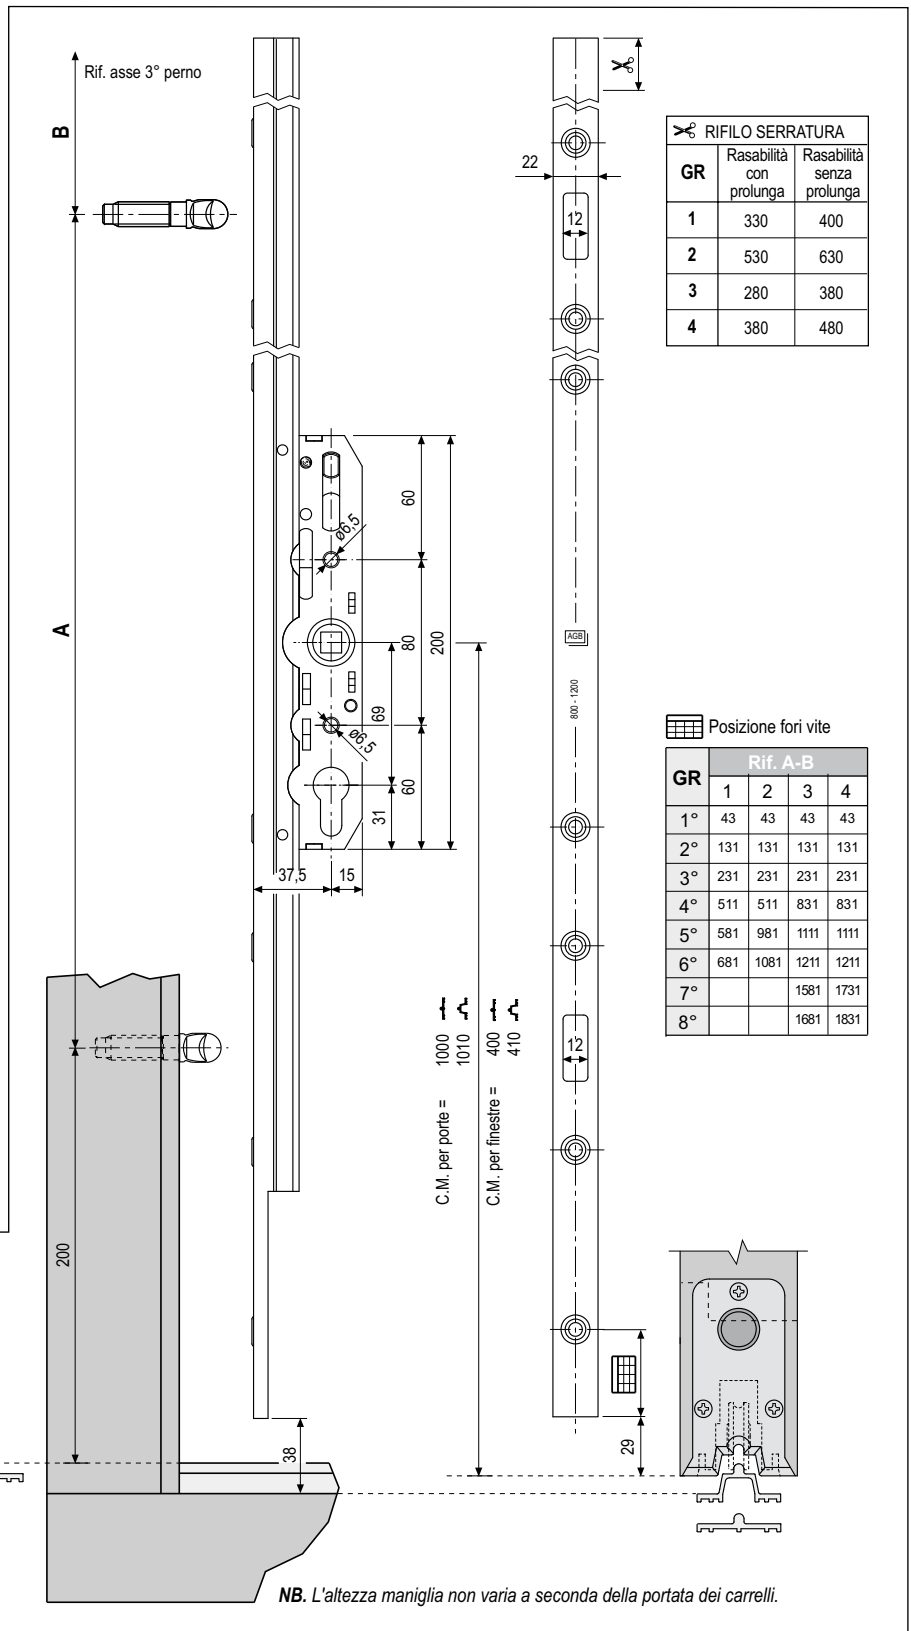

NB. L'altezza maniglia non varia a seconda della portata dei carrelli.

Order Specifications

GR	H handle	Aluminium Silver		Aluminium Brown	
		Article	Finish code	Article	Finish code
1	400/410	G00737.01.01	AF1	G00737.01.02	AF5
2	400/410	G00737.02.01	AF1	G00737.02.02	AF5
3	1000/1010	G00737.03.01	AF1	G00737.03.02	AF5
4	1000/1010	G00737.04.01	AF1	G00737.04.02	AF5