


Terminal element



Description

Terminal element with adjustable cam $\pm 1,5$ mm in height ± 1 mm in pressure with a 4 mm Allen wrench and with 18+8 mm stroke.

Use



- Used in many types of windows and balcony-doors:
- coupled to the vertical corner lock and possible extensions;
- coupled to the lower corner locks and possible extensions;

- on hinge side of angled and tilt windows, with transmission of movement from the lower transom;
- on jambs of large-sized tilt only windows.

For a correct use, see the "Tables for the use of extensions and terminals" in this technical documentation.

Mounting

For PVC/Aluminium-wood/Aluminium Euro-groove doors/windows: 3.5/4.3x25 mm screws with thread suited to the material used for frame construction; for wooden doors/windows: 3.5x35 mm to 4x40 mm screws.

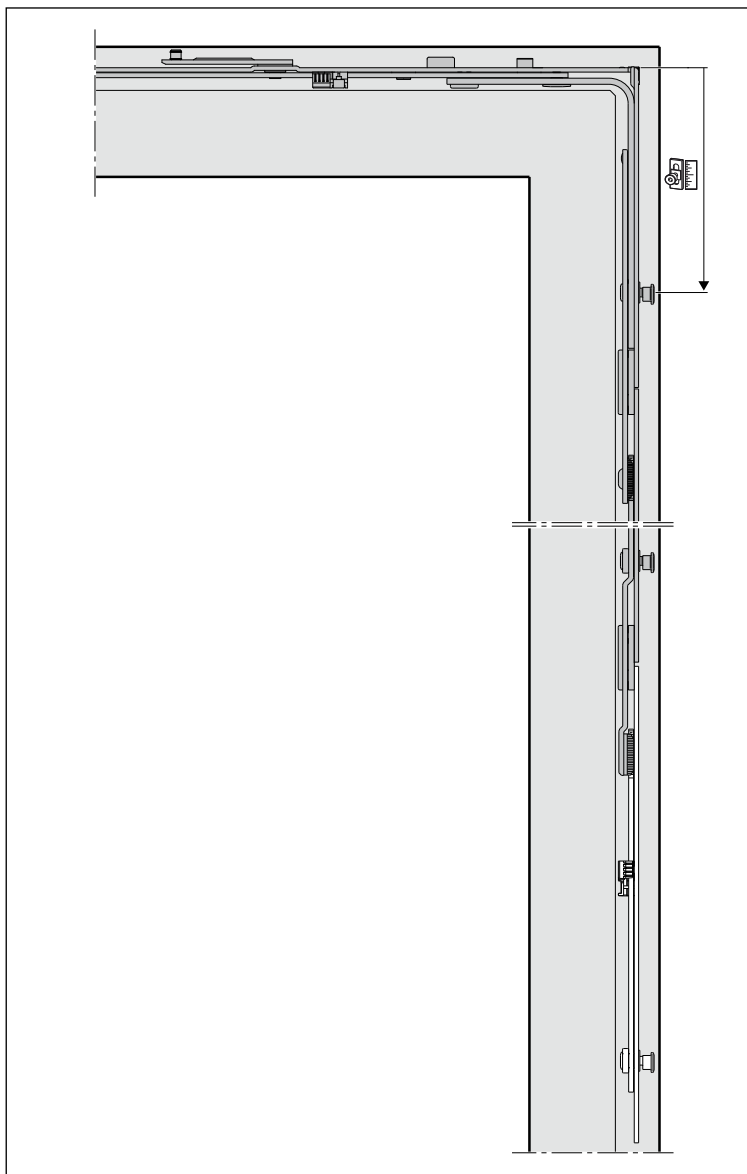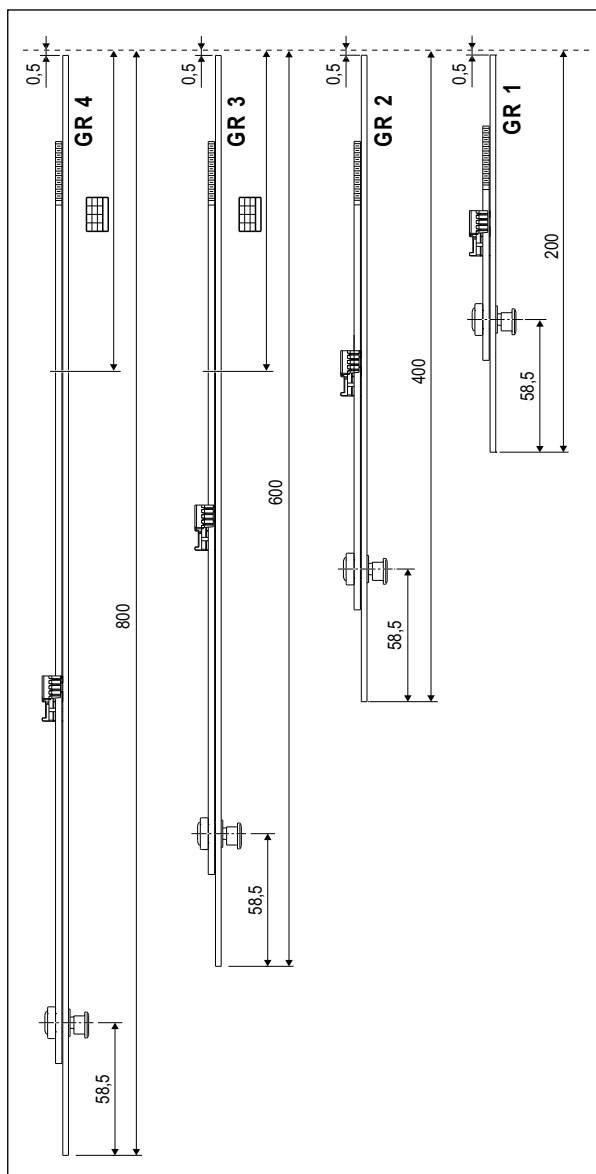

Order Specifications

GR	Article		
1	A50401.00.01	199,5	1
2	A50401.00.02	399,5	1
3	A50401.00.03	599,5	1
4	A50401.00.04	799,5	1

Screw hole position

GR	Ref C-D					
	1°	2°	3°	4°	5°	6°
1	7,5	98,5	183,5			
2	7,5	153,5	298,5	383,5		
3	7,5	173,5	353,5	498,5	583,5	
4	7,5	193,5	373,5	553,5	698,5	783,5