


Arched window terminals for espagnolette, single sash



Description

Terminal for arched windows, set up for the connection to the knurled rod of the espagnolette.

Available in two lengths, 822 mm and 1422 mm.

As standard, adjustable mushroom cam $\pm 1,5$ mm in height ± 1 mm in pressure with a 4 mm Allen wrench, 18+18 mm stroke.



Application

Attached above the espagnolette, it allows to add locking points in the arched part of the sash, resulting in significantly improved performance of the window.

Cannot be used in depressed arches, in Gothic arch, the terminal mustn't exceed the top.

Mounting

Connected directly to the espagnolette. For PVC/Aluminium-wood/ Aluminium Euro-groove doors/windows: 3.5/4.3x25 mm screws with thread suited to the material used for frame construction; for wooden doors/windows: 3.5x35 mm to 4x40 mm screws.

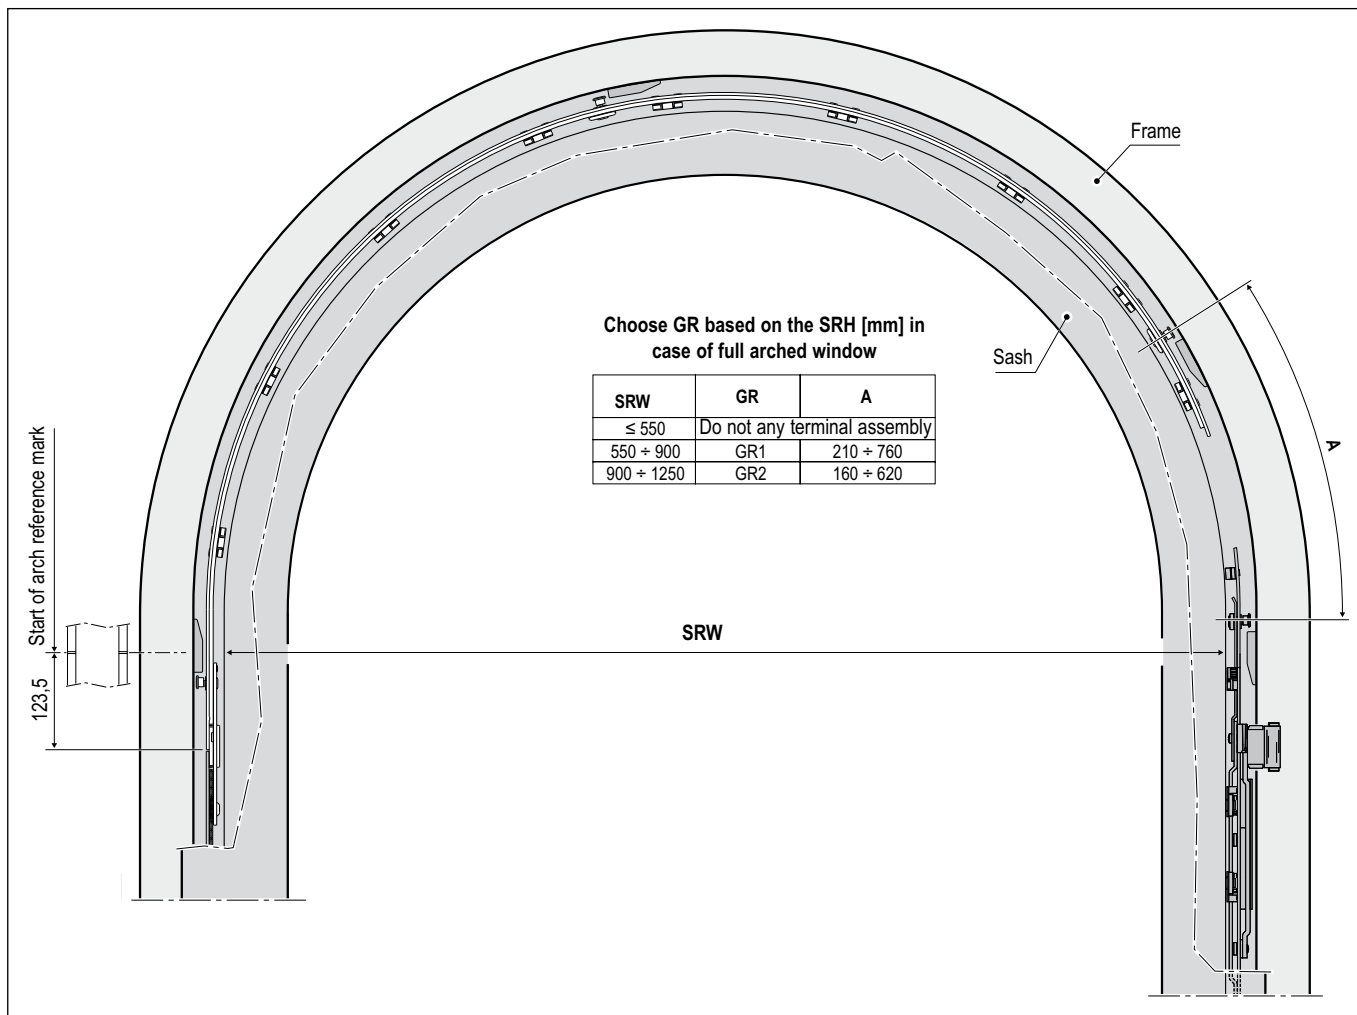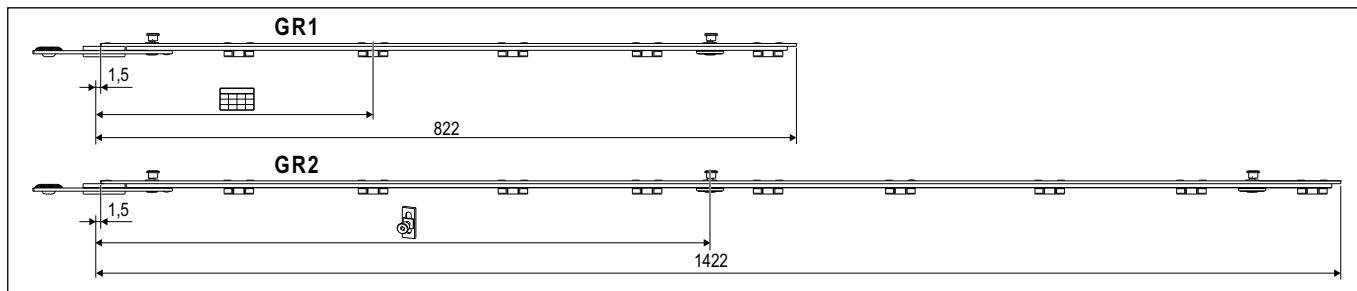

Order Specifications

GR	Article			
1	A50193.21.01	820,5	2	60 - 720,5
2	A50193.21.02	1420,5	3	60 - 720,5 - 1318,5

Screw hole position

GR	Ref B-C											
	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°
1	18	106	170	335	500	665	785	816				
2	18	106	170	335	500	665	785	935	1100	1265	1385	1416